

WOOD CEILINGS

CI/SfB (35) Xy
06/2015



Inspiring Great Spaces™

Armstrong®

standard veneers



Ash (ASH) Oak (OAK) Red Oak (ROA)



US Cherry (CHE) US Walnut (WAL)

custom veneers



Afromosia-Kokradua (AFR) Alder Wood (ALW) Aniegre (ANI)



Ayan (AYA) Bamboo (BAM) Birch (BIC)



Birds Eye Tree (BIR) Chestnut Wood (CHW) Douglas Fir (DFI)



Douka (DOU) Fir (FIR) Framire (FRM)



French Cherry (FCH) Honduras Mahogany (HMA) Iroko (IRO)



Koto (KOT) Larch (LAR) Limewood (LIM)



PROJECT: Hudson Beare Building, University of Edinburgh (UK)
ARCHITECT: University of Edinburgh

PRODUCTS: Bespoke WOOD Canopy with WOOD Veneer US Walnut, Plain, Vector Planks, 600 x 1200 mm

INTRODUCTION

Armstrong wood ceilings	03
Environment	04
Armstrong service	05

SEGMENTS

Office	06
Retail & Leisure	07
Transport	08
Education	09

SOLUTIONS

Concealed system	10
Vector system	12
MicroLook system	14
Board system	16

PERFORMANCES

Acoustical & other performances	18
Other design capabilities	20
Installation recommendations	22
Icons definition	23
Perforations	25

Armstrong Wood Ceilings

For timeless natural beauty and elegance – there's simply nothing to match it

Countless generations of building designers have turned to wood to bring richness and texture to their creations. No other material can provide the range of colours and patterns of this most natural building material. No two pieces are ever identical - every single piece is unique.

It can make a structure simple and elegant, sleek and modern, classic yet cool - skilfully used it can create exactly the ambience needed to make any space special.

Now Armstrong has harnessed the enduring beauty of wood in a range of ceiling tiles, giving you an almost endless choice of high performance linings for your building.

The Armstrong wood range – ceilings you'll look up to.


Armstrong wood ceilings – your choice

Designers are increasingly choosing Armstrong wood ceilings to provide an extra level of luxury for their buildings. In the US, wood already accounts for one in five of all Armstrong specialty ceiling installations – whilst in many other markets, our systemised wood ceilings have quickly become an established option amongst architects keen to bring quality and opulence to prestige environments.

It's not surprising when you see the benefits that Armstrong wood ceilings have to offer:

- Style and elegance for any interior
- Wide choice of real wood veneer finishes and design formats
- Meet all performance requirements
- Easy-plan, easy-fit grid system solutions
- Natural materials – solvent-free and fully recyclable at the end of life
- Engineered by Armstrong

For looks that say something special about your interior – Armstrong Wood Ceilings have the edge.

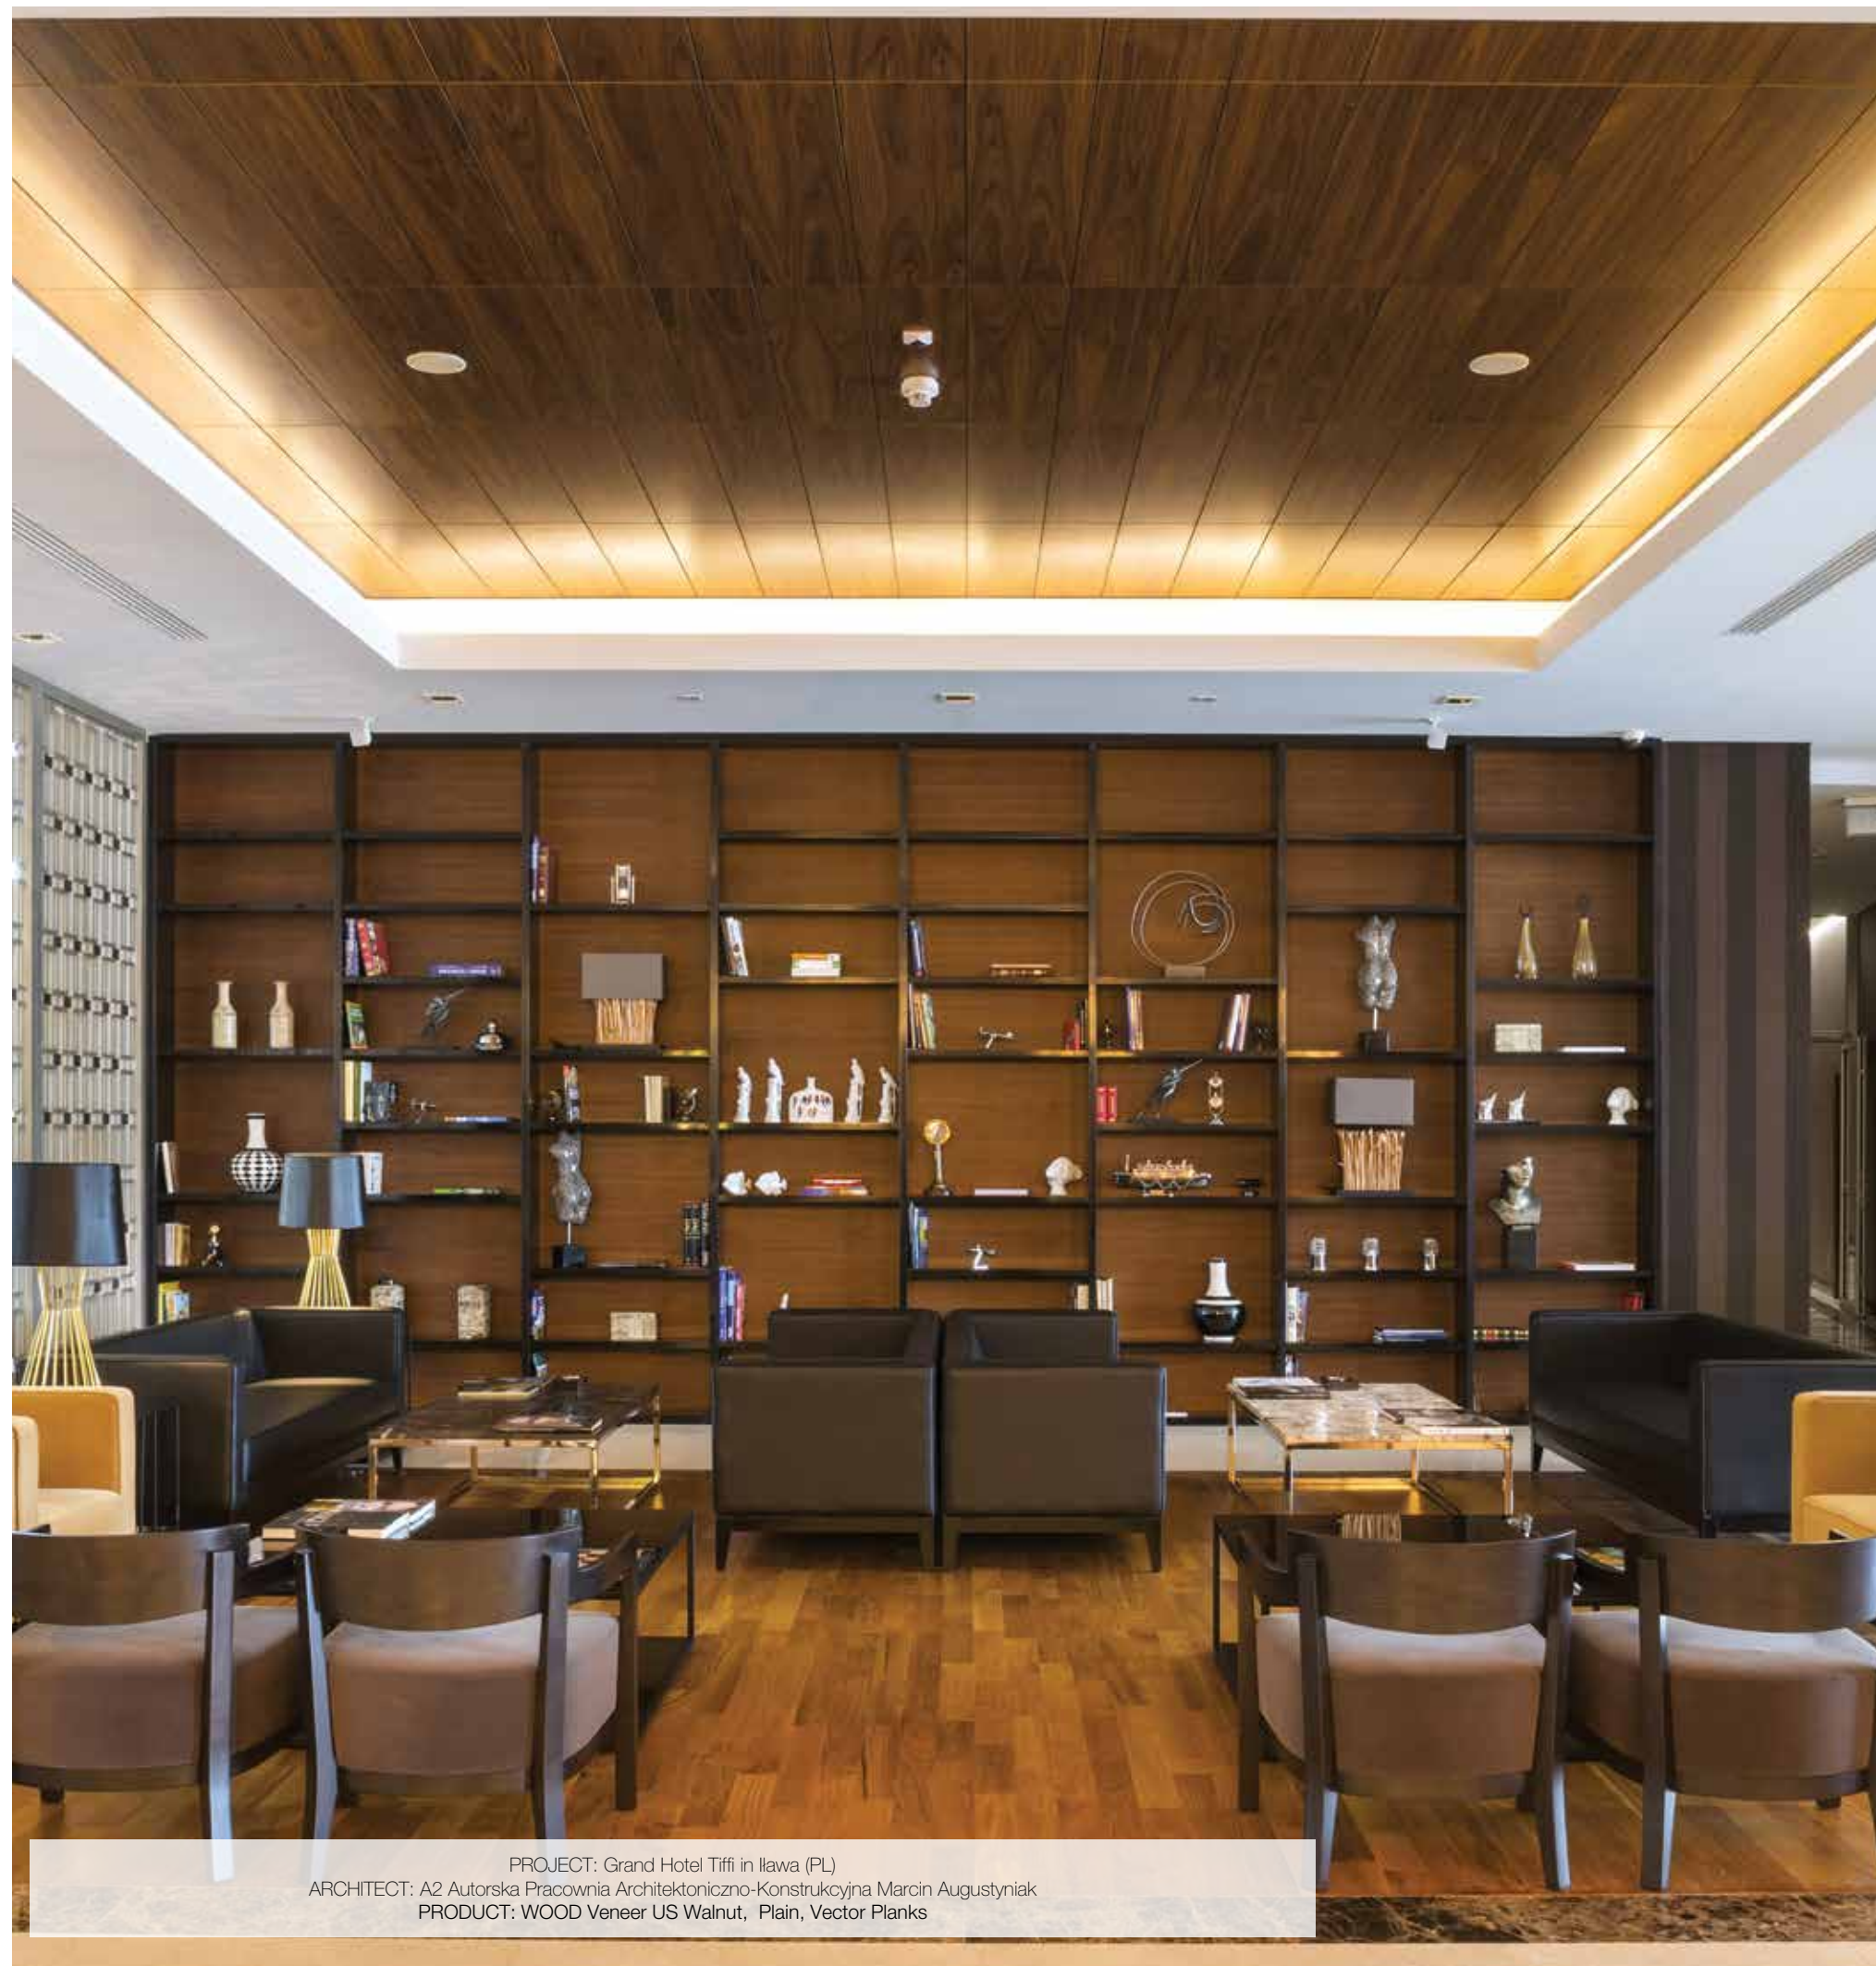

PROJECT: Grand Hotel Tiffi in Ilawa (PL)
 ARCHITECT: A2 Autorska Pracownia Architektoniczno-Konstrukcyjna Marcin Augustyniak
 PRODUCT: WOOD Veneer US Walnut, Plain, Vector Planks

environment



Armstrong and the environment

Armstrong takes sustainability very seriously. Like other major companies around the world, we have been investing to continually reduce the impact of our market leading ceiling products on the environment – cutting waste, removing environmentally damaging chemicals, improving the efficiency of our manufacturing processes and conserving energy and precious raw materials.

Our Wood Ceiling products are manufactured from the highest quality MDF derived from natural woods, specially selected to contain no allergic ingredients. All surface finishes are protected using solvent-free lacquers for long life.

Armstrong's Unique Service

1

Consulting and planning

Each Armstrong project begins with an in-depth, one-on-one consultation with the specifier or main contractor. Technical support and product recommendations are made once we understand the design, functionality and performance requirements of the space.

2

Engineering and production

Working to this design brief, CAD drawings bespoke to the project are created which detail aspects such as ceiling layout, views and perspectives. These details are then used to engineer a production schedule along with any specific installation instructions that may be required at this early stage. Some are best sorted sooner rather than later!

3

Logistics and installation

It doesn't matter if one project uses the same products in the same way as another. It's still unique to us and it's still unique to the specialist contractor installing our systems. That's why we provide them with a tailored logistics plan devised to maximise the benefits of JIT (Just-In-Time) implementation. Then, if they need us on site for additional guidance, we will deliver there too.

4


Maintenance and support

Our customer service doesn't end when a project is complete. Because if that project then needs adapting to some new requirements in any way or expanding, we can continue to provide fitting solutions. We partner with specialist contractors throughout the world who we rely on to help you take your project to the next stage, whether it is adaptation, expansion, repair or basic maintenance.

Welcome to our playing fields

Office


For some clients, image is everything – whether to reflect the nature of the business, attract staff or impress customers and other visitors. Working with Armstrong Wood Ceilings, boardrooms, executive offices, reception areas and key office areas are simply transformed to create exactly the acoustic environment and visual effect needed for a truly prestige interior.

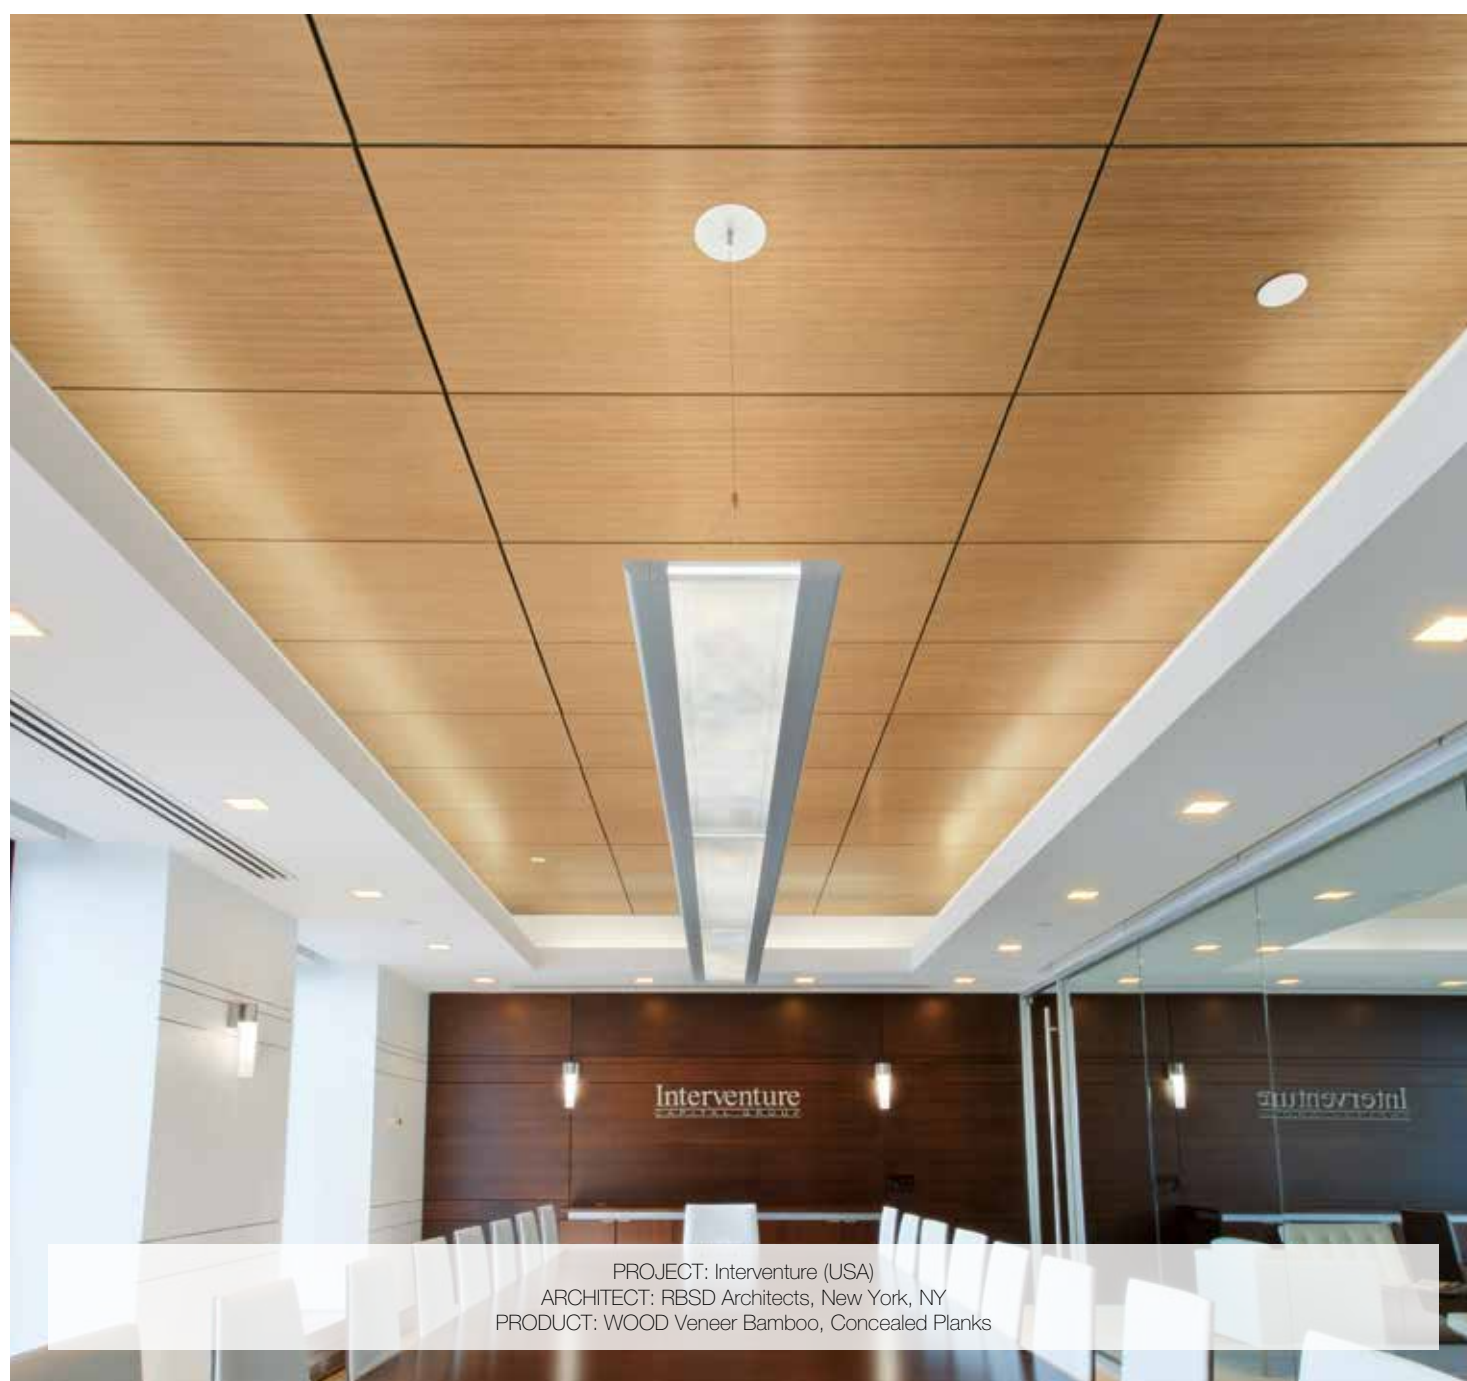

PROJECT: Interventure (USA)
ARCHITECT: RBSD Architects, New York, NY
PRODUCT: WOOD Veneer Bamboo, Concealed Planks

Retail & leisure

In shops and retail environments style is everything. Natural wood ceilings make a statement. They help to define spaces and create warmth and ambience, as well as controlling noise levels for a superior shopping experience.

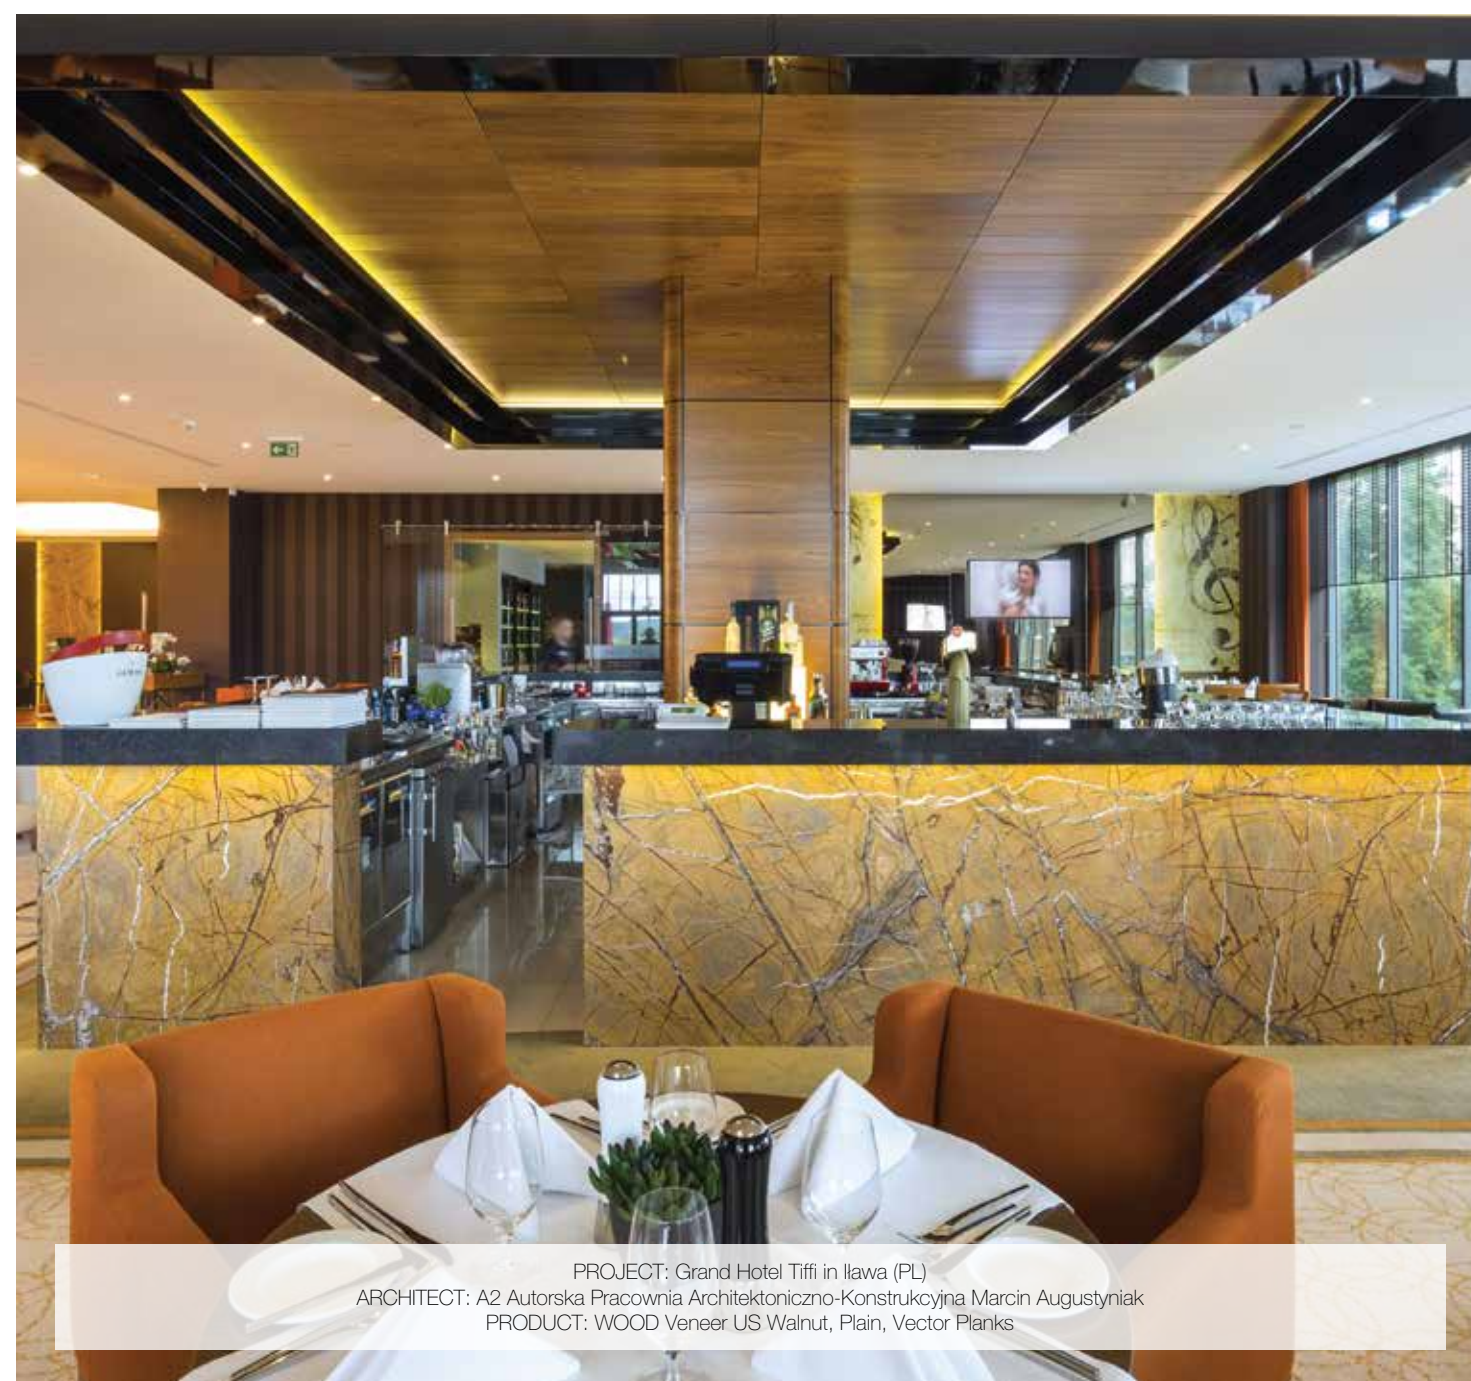

PROJECT: Grand Hotel Tiffi in Ilawa (PL)
ARCHITECT: A2 Autorska Pracownia Architektoniczno-Konstrukcyjna Marcin Augustyniak
PRODUCT: WOOD Veneer US Walnut, Plain, Vector Planks

Transport

Airports can be stressful places. Frequent flyers access executive airport lounges to escape the crowds and enjoy peace and quietness before take off.

The beautiful Armstrong Wood selection creates a relaxing surrounding, providing a world-class experience for every visitor.




Transport hub, lounge area.
PRODUCT: WOOD Veneer US Walnut, perforation Lg 8002, Vector Planks

Education

Intelligibility and concentration are acoustical performance demands that teachers need today, to improve their working conditions as well as their student's.

Armstrong Wood Ceiling satisfies all the sound and design criteria of diverse spaces in classrooms, libraries and other school rooms.

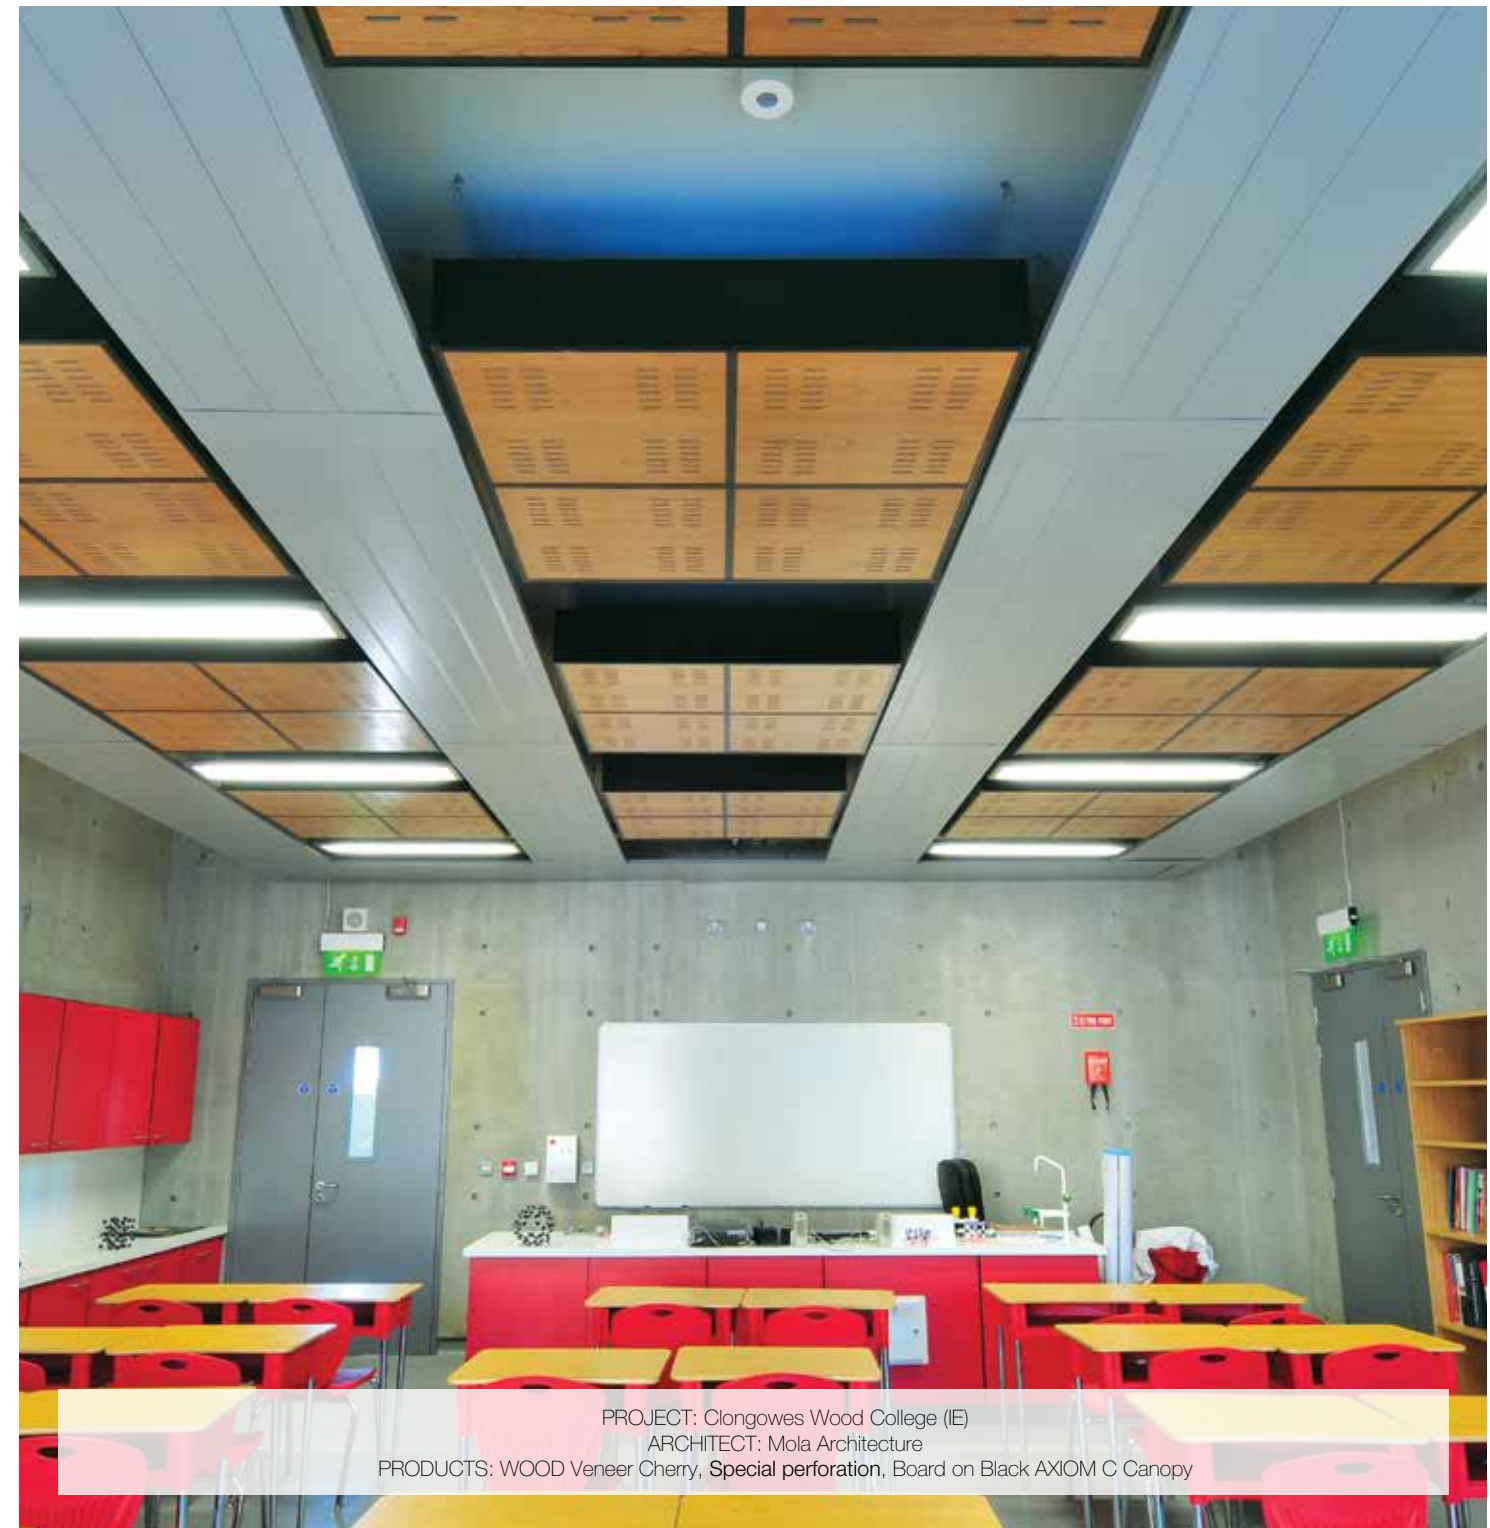

PROJECT: Clongowes Wood College (IE)
ARCHITECT: Mola Architecture
PRODUCTS: WOOD Veneer Cherry, Special perforation, Board on Black AXIOM C Canopy



CONCEALED SYSTEM

When you need to create a clean seamless appearance using standard panels and grid, Armstrong Wood Concealed is the system for you. Standard Concealed Wood panels are simply fixed directly to our Main Runner and Cross-T grid using special T-bar hooks to give a monolithic appearance while enjoying all of the speed and engineering benefits of our normal grid suspension.

BENEFITS

- Clean monolithic appearance
- Multiple layout options
- Large panel sizes (up to 2400mm)
- Safe and secure downward accessibility
- Narrow 6 mm reveal, plus edge banding

APPLICATION AREA

Larger ceiling expanses where a monolithic appearance is preferred

PRODUCT: Veneer US Cherry, perforation Rg 8013, Concealed, 600 x 1800 mm



CONCEALED SYSTEM

STANDARD VENEERS



Ash (ASH)



Oak (OAK)



Red Oak (ROA)



US Cherry (CHE)



US Walnut (WAL)

All Veneers have a matt finish.
Variation between wood veneer panels may occur due to the natural characteristics of the wood and grain.
Custom veneers available.

MODULES



600 x 1200 mm



600 x 1800 mm




600 x 2400 mm

PERFORATIONS AND ACOUSTICS




Plain

α_w 0.10(L)




Rg 3003 (3%)

α_w 0.35(L)



Rg 8013 (13%)

α_w 0.70(L)



Lg 8002 Grooves (2%)
Groove size: 3 x 3 mm
 α_w 0.45(L)

RANGE

Perforations	Dimensions	Suspension System: Prelude 24 XL ² /TLX
		 Concealed
Plain	600 x 1200 x 17 mm	CS 5145 M
Plain	600 x 1800 x 17 mm	CS 5146 M
Plain	600 x 2400 x 17 mm	CS 5147 M
Rg 3003	600 x 1200 x 17 mm	CS 5148 M
Rg 3003	600 x 1800 x 17 mm	CS 5149 M
Rg 3003	600 x 2400 x 17 mm	CS 5150 M
Rg 8013	600 x 1200 x 17 mm	CS 5151 M
Rg 8013	600 x 1800 x 17 mm	CS 5152 M
Rg 8013	600 x 2400 x 17 mm	CS 5153 M
Lg 8002 Grooves	600 x 1200 x 17 mm	CS 5154 M
Lg 8002 Grooves	600 x 1800 x 17 mm	CS 5155 M
Lg 8002 Grooves	600 x 2400 x 17 mm	CS 5156 M



EEA Euroclass B-s2, d0

EN 13501-1



$\lambda = 0.12$ W/m K

EN 12667 & ISO 8301



≤70 % RH



≈ 14 kg/m²

Full Acoustical performances

Page 18

Light Reflectance

Page 19

Please contact Armstrong Technical Sales for further details.



VECTOR SYSTEM

- BENEFITS**
- Narrow 6 mm reveal that gives a sleek monolithic look
 - Distinctive ceiling finishing
 - Available in planks, for a modern aesthetic solution
 - Different panel sizes can be integrated in the same ceiling space, for a true flexible ceiling solution

APPLICATION AREA

Used in a variety of ceiling areas: entrance halls, lounge areas, executive office suites, meeting and conference rooms



PROJECT: Grand Hotel Tiffi in Ilawa (PL)
ARCHITECT: A2 Autorska Pracownia Architektoniczno-Konstrukcyjna Marcin Augustyniak
PRODUCT: WOOD Veneer US Walnut, Plain, Vector Planks



VECTOR SYSTEM

STANDARD VENEERS



Ash (ASH)



Oak (OAK)



Red Oak (ROA)



US Cherry (CHE)




US Walnut (WAL)

All Veneers have a matt finish.
Variation between wood veneer panels may occur due to the natural characteristics of the wood and grain.
Custom veneers available.

MODULES



600 x 600 mm



600 x 1200 mm



300 x 1200 mm


Custom sizes available on request.

PERFORATIONS AND ACOUSTICS




Plain

α_w 0.10(L)




Rg 3003 (3%)

α_w 0.30(L)



Rg 8013 (13%)


α_w 0.65(L)



Lg 8002 Grooves (2%)

Groove size: 3 x 3 mm
 α_w 0.40(L)

RANGE

Perforations	Dimensions	Suspension System: Prelude 24 XL ²
		 Vector
Plain	600 x 600 x 17 mm	CS 4994 M
Plain	600 x 1200 x 17 mm	CS 4996 M
Plain	300 x 1200 x 17 mm	CS 4995 M
Rg 3003	600 x 600 x 17 mm	CS 4997 M
Rg 3003	600 x 1200 x 17 mm	CS 4999 M
Rg 3003	300 x 1200 x 17 mm	CS 4998 M
Rg 8013	600 x 600 x 17 mm	CS 5000 M
Rg 8013	600 x 1200 x 17 mm	CS 5002 M
Rg 8013	300 x 1200 x 17 mm	CS 5001 M
Lg 8002 Grooves	600 x 600 x 17 mm	CS 5003 M
Lg 8002 Grooves	600 x 1200 x 17 mm	CS 5005 M
Lg 8002 Grooves	300 x 1200 x 17 mm	CS 5004 M



EN 13501-1

EEA Euroclass B-s2, d0



EN 12667 & ISO 8301

λ = 0.12 W/m K



≤70 % RH



≈ 14 kg/m²

Full Acoustical performances Page 18

Light Reflectance Page 19

Please contact Armstrong Technical Sales for further details.



MICROLOOK SYSTEM

BENEFITS

- Easy to install and access for service
- Flexible designs: mix and match panel sizes
- Range of prestige real wood veneer or durable and economical laminated finishes

APPLICATION AREA

Used in a variety of ceiling areas; from reception areas to retail stores and designer boutiques



PROJECT: Rowe Mineralölwerk GmbH (DE)
ARCHITECT: Braun Architekturbüro
PRODUCT: WOOD Veneer Mahogany, MicroLook



MICROLOOK SYSTEM

STANDARD VENEERS



Ash (ASH)



Oak (OAK)



Red Oak (ROA)



US Cherry (CHE)



US Walnut (WAL)

All Veneers have a matt finish. Variation between wood veneer panels may occur due to the natural characteristics of the wood and grain.

Custom veneers available.

LAMINATES



Curly Maple (CM)



Pear (PH)



Canadian Maple (MD)

Curly Maple and Pear Laminates have a semi-matt finish and the Canadian Maple Laminate has an extra-matt finish.

MODULES



600 x 600 mm



600 x 1200 mm



300 x 1200 mm


Custom sizes available on request.

PERFORATIONS AND ACOUSTICS




Plain

α_w 0.10(L)




Rg 3003 (3%)

α_w 0.30(L)



Rg 8013 (13%)

α_w 0.65(L)



Lg 8002 Grooves (2%)
Groove size: 3 x 3 mm
 α_w 0.40(L)

RANGE

Perforations	Dimensions	Suspension System: Prelude 15TL - Prelude 15 XL ² - Interlude - Silhouette*
Laminates		 MicroLook 8
Plain	600 x 600 x 12 mm	
Veneers		CS 9774 M
Plain	600 x 600 x 13 mm	CS 5006 M
Plain	600 x 1200 x 13 mm	CS 5008 M
Plain	300 x 1200 x 13 mm	CS 5007 M
Rg 3003	600 x 600 x 13 mm	CS 5009 M
Rg 3003	600 x 1200 x 13 mm	CS 5011 M
Rg 3003	300 x 1200 x 13 mm	CS 5010 M
Rg 8013	600 x 600 x 13 mm	CS 5012 M
Rg 8013	600 x 1200 x 13 mm	CS 5014 M
Rg 8013	300 x 1200 x 13 mm	CS 5013 M
Lg 8002 Grooves	600 x 600 x 13 mm	CS 5015 M
Lg 8002 Grooves	600 x 1200 x 17 mm	CS 5017 M
Lg 8002 Grooves	300 x 1200 x 13 mm	CS 5016 M

* For 600 x 600 mm module



EEA Euroclass B-s2, d0

EN 13501-1



Laminates
 λ = 0.18 W/m K
Veneers
 λ = 0.12 W/m K

EN 12667 & ISO 8301



≤70 % RH



Laminates
≈ 10 kg/m²
Veneers
≈ 10.5 kg/m²
Veneer (17 mm)
≈ 14 kg/m²

Full Acoustical performances

Page 18

Light Reflectance

Page 19

Please contact Armstrong Technical Sales for further details.



BOARD SYSTEM

- BENEFITS**
- Wide range of prestige real wood veneer
 - Easy to install and access for service
 - Flexible designs: mix and match panel size

APPLICATION AREA
Used in a variety of ceiling areas: from reception areas to halls in leisure centres

PROJECT: Clongowes Wood College (IE)
ARCHITECT: Mola Architecture
PRODUCTS: WOOD Veneer US Cherry, Special perforation, Board on Black AXIOM C Canopy



BOARD SYSTEM

STANDARD VENEERS



Ash (ASH)




Oak (OAK)



Red Oak (ROA)




US Cherry (CHE)




US Walnut (WAL)

All Veneers have a matt finish.
Variation between wood veneer panels may occur due to the natural characteristics of the wood and grain.
Custom veneers available.

MODULES



600 x 600 mm



600 x 1200 mm



300 x 1200 mm


Custom sizes available on request.

PERFORATIONS AND ACOUSTICS




Plain

α_w 0.10(L)




Rg 3003 (3%)

α_w 0.30(L)



Rg 8013 (13%)

α_w 0.65(L)



Lg 8002 Grooves (2%)
Groove size: 3 x 3 mm
 α_w 0.40(L)

RANGE

Perforations	Dimensions	Suspension System: Prelude 24TLX
		
		Board
Plain	600 x 600 x 13 mm	CS 4982 M
Plain	600 x 1200 x 13 mm	CS 4984 M
Plain	300 x 1200 x 13 mm	CS 4983 M
Rg 3003	600 x 600 x 13 mm	CS 4985 M
Rg 3003	600 x 1200 x 13 mm	CS 4987 M
Rg 3003	300 x 1200 x 13 mm	CS 4986 M
Rg 8013	600 x 600 x 13 mm	CS 4988 M
Rg 8013	600 x 1200 x 13 mm	CS 4990 M
Rg 8013	300 x 1200 x 13 mm	CS 4989 M
Lg 8002 Grooves	600 x 600 x 13 mm	CS 4991 M
Lg 8002 Grooves	600 x 1200 x 17 mm	CS 4993 M
Lg 8002 Grooves	300 x 1200 x 13 mm	CS 4992 M



EEA Euroclass B-s2, d0
EN 13501-1



$\lambda = 0.12$ W/m K
EN 12667 & ISO 8301



≤ 70 % RH



13 mm
 ≈ 10.5 kg/m²
17 mm
 ≈ 14 kg/m²

Full Acoustical performances	Page 18
Light Reflectance	Page 19

Please contact Armstrong Technical Sales for further details.

PERFORMANCES

ACOUSTICAL PERFORMANCES



SOUND ABSORPTION

EN ISO 354 &
EN ISO 11654

Is the control of reflected sound, provided by the suspended ceiling, within a space.

	α_w	NRC	125	250	500	1000	2000	4000	Hz	Octave Band centre frequency (Hz)
Veneers Plain	Standard	0.10(L)	0.10	0.30	0.15	0.10	0.05	0.10	0.15	α_p
	Concealed	0.10(L)	0.10	0.30	0.15	0.10	0.05	0.10	0.15	α_p
Veneers Rg 3003 (3%)	Standard	0.30(L)	0.35	0.45	0.40	0.35	0.30	0.25	0.25	α_p
	Concealed	0.35(L)	0.35	0.45	0.45	0.40	0.30	0.30	0.25	α_p
Veneers Rg 8013 (13%)	Standard	0.65(L)	0.70	0.45	0.80	0.85	0.65	0.60	0.55	α_p
	Concealed	0.70(L)	0.75	0.55	0.80	0.85	0.70	0.65	0.60	α_p
Veneers Lg 8002 Grooves (2%)	Standard	0.40(L)	0.50	0.50	0.65	0.55	0.40	0.35	0.30	α_p
	Concealed	0.45(L)	0.50	0.45	0.60	0.60	0.45	0.40	0.35	α_p

Sound Absorption Class = up to Class C



SOUND ATTENUATION

EN ISO 10848-2
& EN ISO 717-1

Is the control of horizontal sound transmission through a suspended ceiling and common void located above adjacent spaces.

These attenuation values are not valid for Concealed Wood.

	D_{nfw}
Veneers Plain	41 dB
Veneers Rg 3003 (3%)	35 dB
Veneers Rg 8013 (13%)	22 dB
Veneers Lg 8002 Grooves (2%)	29 dB



LIGHT REFLECTANCE

EN ISO
7742-2 & 3

Veneers	Plain	Perforated Rg 3003	Perforated Rg 8013	Perforated Lg 8002
Ash	57%	54%	49%	54%
Oak	30%	30%	26%	30%
Red Oak	34%	33%	30%	33%
US Cherry	29%	28%	23%	28%
US Walnut	14%	14%	12%	16%

Laminates*	Plain
Curly Maple	72%
Pear	31%
Canadian Maple	53%

*Only available for MicroLook 8 Wood Laminate.

The light reflectance values shown above are the results of testing, however, due to the natural variation in wood veneers there may be some small deviation from these published values.

OTHER DESIGN CAPABILITIES

CONCEALED SYSTEM LAYOUTS

Standard layouts

600 x 1200 mm

600 x 1800 mm

600 x 2400 mm

Optional layouts

Staggered 600 x 1200 mm

Staggered 600 x 1800 mm

Staggered 600 x 2400 mm

Combined modules

600 x 1200 mm & 600 x 1800 mm

600 x 1800 mm & 600 x 2400 mm

600 x 1200 mm & 600 x 2400 mm

Grid layout

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

Prelude 24 Main Runner

Prelude 24 TLX / XL² Cross Tee

Concealed Wood panel

Standard and optional layouts also available for other systems. Please contact Armstrong Technical Sales for further details.

WOOD EFFECTS ON METAL

Wood effects is a metal ceiling capability by Armstrong, offering architects and building owners the opportunity to combine the attractiveness and exclusivity of a natural wood surface with all the advantages of a metal ceiling.

- Among the benefits of a metal wood effect product:
- Higher design flexibility with wider range of panel size and formats
 - Light weight
 - Can be installed in areas with higher humidity
 - Keeps colour stability over time
 - Cost effective perforations for wider acoustic performance
 - Better fire performance
 - Large range of wood effects

Please contact Armstrong Technical Sales for further details.



INSTALLATION RECOMMENDATIONS

ICONS DEFINITION

CONDITIONS OF INSTALLATION

Wood tiles should be unpacked and stocked flat in an environment that is closed and not humid. Wood tiles should always be moved with care. Before installation, it is recommended to open the cartons and stack the tiles flat for 3 to 8 days in the room where they will be installed in order to stabilise the tiles in their future environment and conditions of use. Possible dimensional variations in a humid environment are those from typical wood-based tiles i.e. the differential between the driest and the most humid conditions can be up to 5 mm/m. The installation of Wood tiles should take place during the last phase of the job, in closed, and sometimes heated, rooms. No additional work potentially increasing the level of humidity in the room should be undertaken after the tiles are installed (concrete and plasterboards should be dry). Wood tiles should be installed in strict accordance with Armstrong installation recommendations.


INSTALLATION RECOMMENDATIONS

Wood Veneer ceiling tiles are made with natural wood veneers. As they are natural products, their colour and structure regularity cannot be guaranteed. In order to obtain the best decorative effect, we advise you to follow the points below:

1. Order all wood material at the same time.
2. Display all the tiles before fitting.
3. Arrange them aesthetically with regard to their shade and grain.
4. Install the ceiling tiles accordingly.

With each order, it is recommended to allow for some extra tiles to accommodate for visual variations, as it will be very unlikely that similar looking tiles can be ordered later.

INSTALLATION GUIDE



Fire reaction

National Building Regulations (where applicable) require that buildings meet the appropriate Euroclass **fire reaction** performance depending upon the area of application. Armstrong products have been tested to the harmonised European fire reaction standards and meet the minimum performance criteria.



Acoustic Performance

The occupant of a space, be it an office, a classroom, a shop, or any similar environmental needs:

- Intelligibility – to hear and to be understood
- Confidentiality – to not be overheard
- Concentration – to not be disturbed

The optimum acoustic climate will be obtained with the right combination of sound absorption and sound attenuation.



Sound Attenuation

Is the control of horizontal sound transmission through a suspended ceiling and common void located above adjacent spaces.



Sound Absorption

Is the control of reflected sound, provided by the suspended ceiling, within a space.



Humidity Resistance

Ceiling installations are facing more and more demanding humidity conditions such as fast track programmes, buildings with intermittent heating and cooling, areas with a high concentration of people, structures which are open to the exterior environment, etc.



Light Reflectance

High levels of light reflectance from suspended ceilings can contribute significantly to maintaining the correct levels of illumination for all interior environments, as well as helping to reduce excessive electrical energy consumption. Armstrong conducts extensive tests of light reflectance on a wide range of its products, in accordance with EN ISO 7724-2 and 3 (as specified in EN 13964), by third party accredited laboratories. The light reflectance values indicated on page 19 are as determined by these tests.



Thermal Conductivity

The ever increasing commitment to energy conservation, dictates that buildings should be as energy efficient as is compatible with their function, use and as specified in national building regulations. Interior building products which can form part of the external structure, such as suspended ceilings beneath a roof construction, can contribute to minimising the loss of heat to the exterior by reference to their thermal conductivity values. Armstrong conducts extensive tests of thermal conductivity on a wide range of its products, in accordance with EN 12667 (as specified in EN 13964) and ISO 8301, by third party accredited laboratories. The thermal conductivity values indicated on each product data page are as determined by these tests.



PROJECT: ZPUH Michał (PL)
ARCHITECT: Pracownia Aupa Marek Gierasimiuk
PRODUCT: WOOD Veneer Oak, Plain, MicroLook 8 Planks

WESTERN
EUROPE

Belgium & Luxembourg

Armstrong Building Products B.V.
Postbus 3803
4800 DV Breda
Netherlands
Tel.: +32 02 223 00 72
Fax: +31 (0) 76 521 04 07
e-mail: benelux-info@armstrong.com
www.armstrong-plafonds.be

Germany & Switzerland

Armstrong Building Products
Kundenservice
Office Building Quadrium
Claudius Prinsenlaan 126
4818 CP Breda
Netherlands
Tel.: +49 (0) 251 7603 210
Fax: +49 (0) 251 7603 593
e-mail: deutsche-info@armstrong.com
www.armstrong-decken.de
www.armstrong-decken.at
www.armstrong.ch

Firmensitz
Armstrong Building Products GmbH
Robert-Bosch-Str. 10
48153 Münster
Germany

Armstrong Metaldecken AG
Breitfeldstrasse 8
9015 St. Gallen
Switzerland
Tel.: +41 (0) 71 313 63 63
Fax: +41 (0) 71 313 64 00
e-mail: gema@armstrong.com
www.armstrong.ch
www.gema.biz

Zentralschweiz
Armstrong Metaldecken AG
Büro / Lager Zentralschweiz
Grossweid 9
6026 Rain
Switzerland
Tel.: +41 (0) 41 921 63 63
Fax: +41 (0) 41 921 63 80
e-mail: gema@armstrong.com
www.armstrong.ch
www.gema.biz

Armstrong Plafonds Métalliques SA
Bureau et Dépôt Suisse Romande
Avenue de Châtelaine 87
1219 Châtelaine
Suisse
Tel.: +41 (0) 22 731 60 70
Fax: +41 (0) 22 731 60 74
e-mail: gema@armstrong.com
www.armstrong.ch
www.gema.biz

Austria

Armstrong Metaldecken GmbH
Bundesstrasse 70
6830 Rankweil
Austria
Tel.: +43 (0) 55 22 34 44-0
Fax: +43 (0) 55 22 34 44-8
e-mail: gema@armstrong.com
www.armstrong.ch
www.gema.biz

Armstrong Metaldecken GmbH
Messendorferstrasse 6
8041 Graz
Austria
Tel.: +43 (0) 316 471 584
Fax: +43 (0) 316 471 584-10
e-mail: gema@armstrong.com
www.armstrong.ch
www.gema.biz

Armstrong Metaldecken GmbH
Fröhlichgasse 42
1230 Wien
Austria
Tel.: +43 (0) 1 904 80 09
Fax: +43 (0) 1 904 80 09
e-mail: gema@armstrong.com
www.armstrong-decken.at
www.gema.biz

Spain & Portugal

Armstrong Building Products SAS
Immeuble Paryseine
3, allée de la Seine
94854 Ivry-sur-Seine Cedex
France – Alcobendas Madrid
Tel.: (+ 34) 91 352 53 17
Fax: (+ 34) 91 350 20 15
e-mail: info-espana@armstrong.com
www.armstrong.es/techos

France & French Speaking Africa

Armstrong Building Products SAS
Bureaux Commerciaux France
Immeuble Paryseine
3 Allée de la Seine
94854 Ivry-sur-Seine
France
Tel.: 0800 41 36 43
Fax: +33 1 45 21 04 11
e-mail: info-France@armstrong.com
www.armstrong.fr/plafonds

Siège social
Armstrong Building Products SAS
67 rue de Salins – CS 20089
25302 Pontarlier Cedex
France

Italy & Greece

Armstrong Building Products
Uffi cio Commerciale Italia
Immeuble Paryseine
3 Allée de la Seine
94854 Ivry-sur-Seine
France
Tel.: +39 02 66 22 76 50
Fax: +39 02 66 20 14 27
e-mail: info-italia@armstrong.com
www.armstrong-soffitti.it

Netherlands

Armstrong Building Products B.V.
Postbus 3803
4800 DV Breda
Netherlands
Tel.: (+31) 076 523 02 00
Fax: (+31) 076 521 04 07
e-mail: benelux-info@armstrong.com
www.armstrong.nl/plafonds

United Kingdom

Armstrong World Industries Ltd
Building Products Division
Armstrong House
38 Market Square
Uxbridge UB8 1NG
United Kingdom
Tel.: 0800 371 849
Fax: +44 1895 274287
e-mail: sales-support@armstrong.com
www.armstrong-ceilings.co.uk

Republic of Ireland

Armstrong World Industries Ltd.
108 Greenlea Road
Terenure
Co Dublin 6W
Ireland
Tel.: 1800 409002
Tel.: (+353) 1 499 1701
Fax: (+353) 1 490 7061
e-mail: sales-support@armstrong.com
www.armstrong-ceilings.ie

CENTRAL
EUROPE NORTH

(DK/EE/FIN/IS/LT/LV/N/PL/S)

Armstrong Building Products BV
Sp. z o.o. Oddział w Polsce
ul. Domaniewska 37
02-672 Warszawa
Poland
Tel.: (+48) 22 337 86 10/ 86 11
Fax: (+48) 22 337 86 12
e-mail: service-ce@armstrong.com
Latvia: www.armstrong.lv
Lithuania: www.armstrong.lt
Norway: www.armstrong.no
Poland: www.armstrong.pl
Sweden: www.armstrong.se

CENTRAL
EUROPE SOUTH

**(AL/BA/BG/CZ/HR/HU/KO/
MD/ME/MK/RO/RS/SK/SI)**

Armstrong Building Products
Lighthouse building,
Jankovcova 1569/2c,
170 00 Praha 7,
Czech Republic
Tel.: +420 725 477 588
e-mail: service-ce@armstrong.com
Czech Republic: www.armstrong.cz
Hungary: www.armstrong.co.hu
Romania: www.armstrong.ro
Serbia: www.armstrong.rs
Slovakia: www.armstrong.sk
Slovenia: www.armstrong.si
www.armstrong.eu

EASTERN EUROPE

CIS

Armstrong Moscow GmbH
Mosfi Imovskaya Street 38A,
Moscow 119285,
Russian Federation
Tel.: +7 (495) 258 5100
Fax: + 7 (495) 258 5103
e-mail: info-cis@armstrong.com
Russian Federation: www.armstrong.ru

MIDDLE EAST /
AFRICA / TURKEY

**Armstrong World Industries Ltd
Africa Middle East Turkey Division**

Armstrong House
38 Market Square
Uxbridge UB8 1NG
Tel.: +44 01895 202097
Fax: +44 01895 272928
e-mail: sales-support@armstrong.com
www.armstrong.eu
Israel: www.armstrong.co.il
South Africa:
www.armstrong-ceilings.co.za


**Middle East Regional Office,
Dubai, UAE**

Offi ce No. 2003, 20th Floor
Gold Crest Executive Tower
Jumeirah Lakes Towers
P.O. Box 73831
Dubai, United Arab Emirates
Tel.: +971 4 453 4545
Fax: +971 4 453 4546
info-me@armstrong.com
www.armstrong.ae


Turkey

Armstrong Europa GmbH
Mimar Sinan Mah. Mimar Sinan
Cad. No: 35/2 Cekmekoy
Istanbul
Turkey
Gsm: +90 542 772 49 22
Gsm: +90 544 293 5931
www.armstrong.com.tr
etulpar@armstrong.com


perforations




Plain

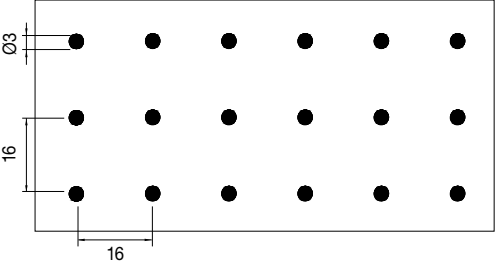

Rg 3003 (3% open area)

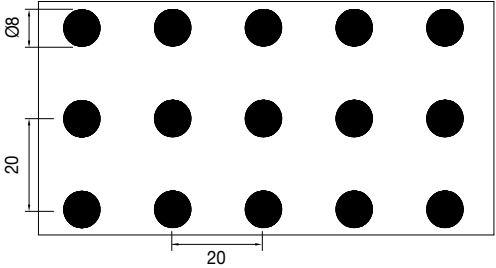

Rg 8013 (13% open area)

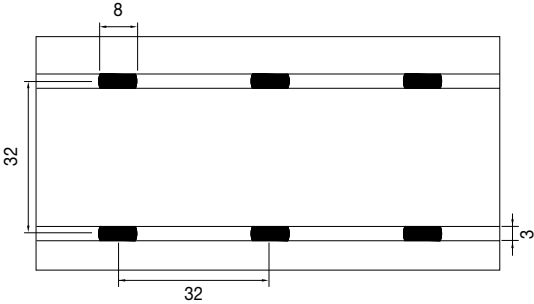

Lg 8002 Grooves (2% open area)
Groove size: 3 x 3 mm

Custom perforations available on request.

custom veneers



Mahogany (MAH)



Natural Beech (NBE)



Olive Ash (OAS)



Padouk (PAD)



Pear (PEA)



Pine (PIN)



Pippy Oak (POA)



Plane Tree (PLA)



Poplar (POR)



Red Pear (RPE)



Rift Cut Oak (RIO)



Sapele (SAP)



Steamed Beech (SBE)



Sycamore (SYC)



US Elm (ELM)



US Maple (MAP)

If an alternative veneer is required, please contact Armstrong Technical Sales.

laminates




Curly Maple (CM)



Pear (PH)



Canadian Maple (MD)

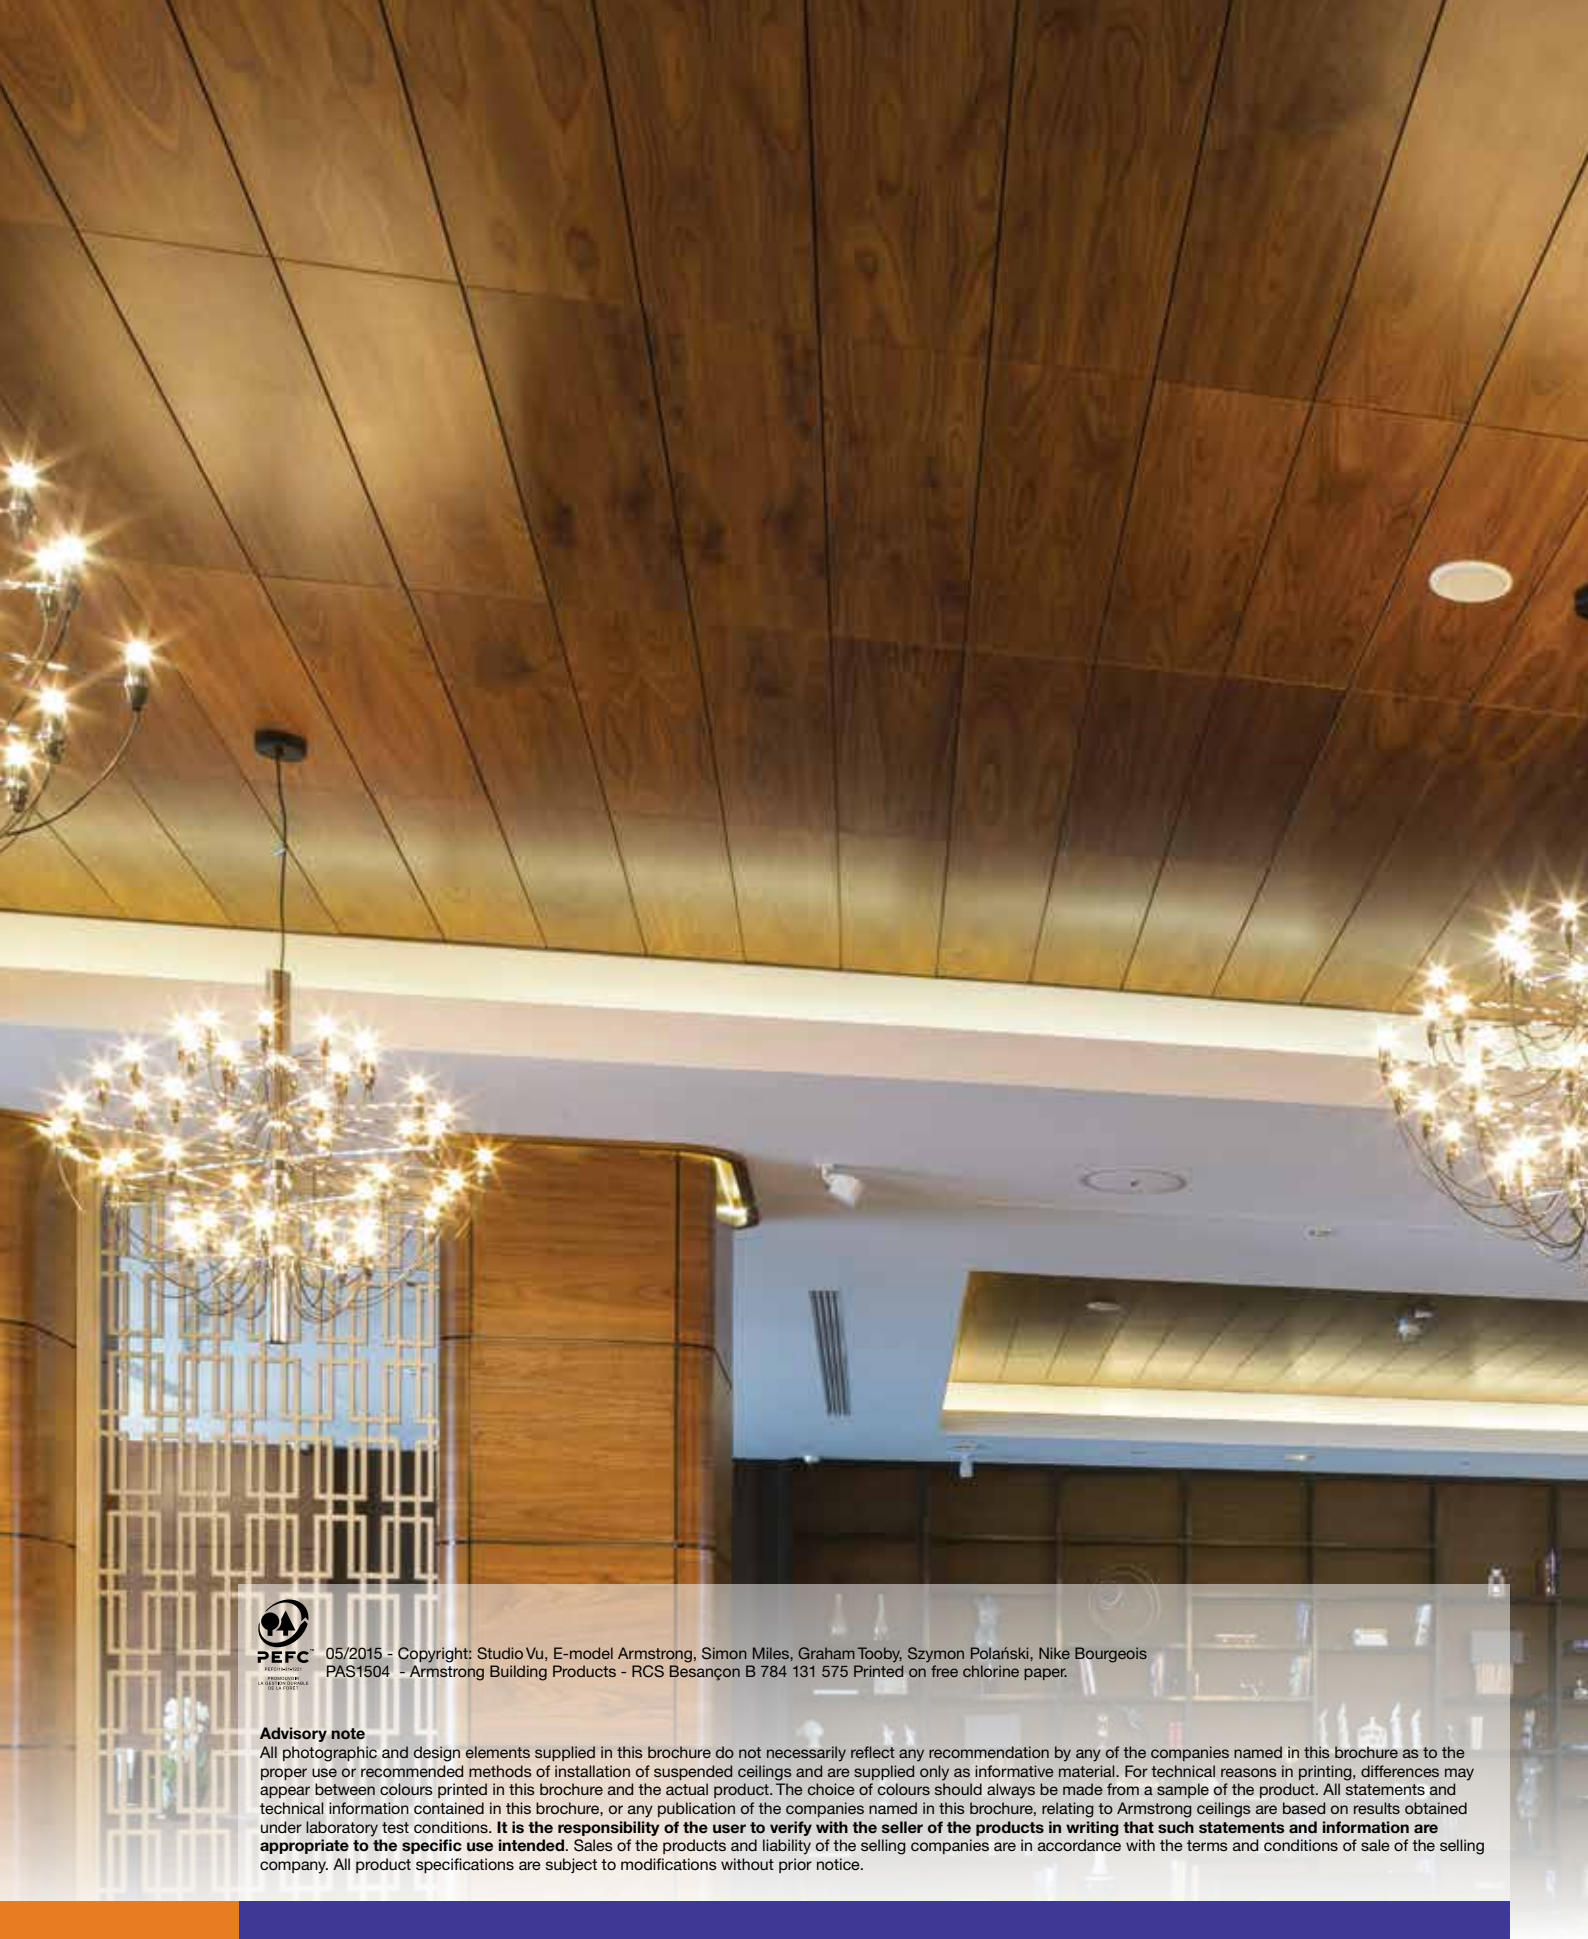

05/2015 - Copyright: Studio Vu, E-model Armstrong, Simon Miles, Graham Tooby, Szymon Polański, Nike Bourgeois
PAS1504 - Armstrong Building Products - RCS Besançon B 784 131 575 Printed on free chlorine paper.

Advisory note

All photographic and design elements supplied in this brochure do not necessarily reflect any recommendation by any of the companies named in this brochure as to the proper use or recommended methods of installation of suspended ceilings and are supplied only as informative material. For technical reasons in printing, differences may appear between colours printed in this brochure and the actual product. The choice of colours should always be made from a sample of the product. All statements and technical information contained in this brochure, or any publication of the companies named in this brochure, relating to Armstrong ceilings are based on results obtained under laboratory test conditions. **It is the responsibility of the user to verify with the seller of the products in writing that such statements and information are appropriate to the specific use intended.** Sales of the products and liability of the selling companies are in accordance with the terms and conditions of sale of the selling company. All product specifications are subject to modifications without prior notice.

www.armstrong-ceilings.co.uk
www.armstrong-ceilings.ie

Armstrong®